


BQ63FB03C0-MB3-

Price

Lead time

Configuration

Type:	B
Size:	Q63
Input:	Metric
Output shaft/bore:	Standard ø25
Mounting:	FB
Mounting position:	B3
Input bore:	-
Coupling:	-

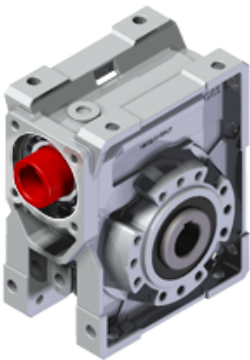


Technical data

Input rpm (n_1):	n.a. min⁻¹
Output rpm (n_2):	n.a. min⁻¹
Ratio (i):	15.00
Nominal power (P_{1R}):	1.70 kW / 2.75 HP
Nominal torque (M_{2R}):	138 Nm / 1159 lb in
Dynamic efficiency (RD):	79%

Selection

Motor power (P_{1M}):	n.a.
Output torque (M_{2M}):	n.a.
Service factor (f.s.):	n.a.

Direction of rotation



Lubrication


Oil quantity:	0.30l
AGIP:	Telium VSF 320
SHELL:	Omala S4 WE 320

On our website

Features	Irreversibility
How to order	Thermal limit
Dimension	Atex certification
Accessories/options	Installation check list
Electric motors	Spare parts list
Selection guide - fs	Complete catalogue
Mounting pos. - lubricant	Selection by power (xls)
Calc. the overhung load	

Axial and radial loads


Input shaft



n_2 (min ⁻¹)	FA (N)	FR (N)
1400	90	450

*Strong axial loads in the DX direction are not allowed

Output shaft



n_2 (min ⁻¹)	FA (N)	FR (N)
200	360	1800
150	400	2000
100	460	2300
75	500	2500
50	600	3000
25	700	3800
15	800	4000

Note


Square - Gear 147Nm **Q63**

3D dimensions on the Web

PQ63FB... Basic wormbox
Riduttore base

Gearbox weight
peso riduttore **6.00 kg**

M. flanges	Kit code	øF	A
63B5	K063.4.041	140	99.5
71B5	K063.4.042	160	97.5
80/90B5	K063.4.043	200	99.5
71B14	K063.4.047	105	97.5
80B14	K063.4.046	120	99.5
90B14	K063.4.041	140	99.5

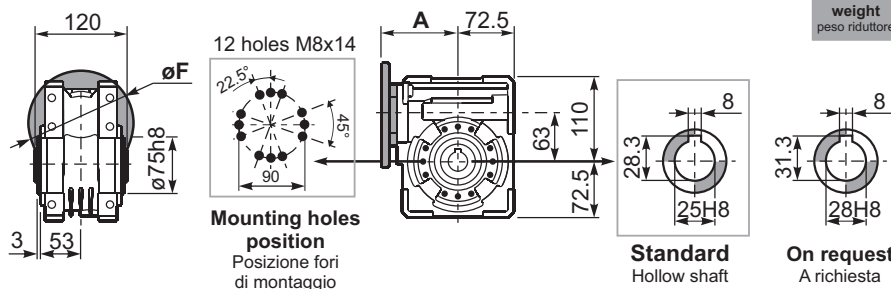


Mounting holes
position
Posizione fori
di montaggio

Standard
Hollow shaft


On request
A richiesta

PQ63FC... Square flange
Flangia quadrata

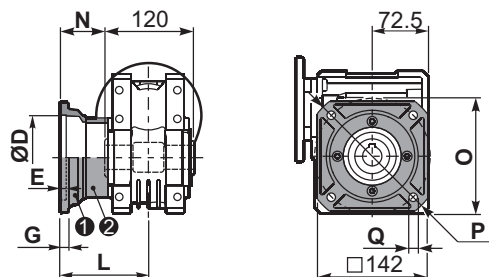


type B	øD	E	G	L	N	O	P	Q	kit code
FC	115 ^{+0.20} _{+0.15}	6	12	86	26	150	180	11	① KQ63.9.010 ② -
FL	115 ^{+0.20} _{+0.15}	6	12	116	56	150	180	11	① KQ63.9.010 ② K063.0.200

PQ63F1... Round flange
Flangia rotonda

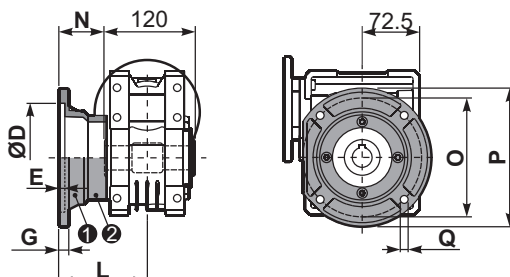


type S	øD	E	G	L	N	O	P	Q	kit code
F1	130 ^{+0.20} _{+0.15}	7	13	110	50	165	200	13	① KS070.9.013 ② -
F2	115 ^{+0.20} _{+0.15}	7	13	124	64	150	175	11	① KS063.9.013 ② -
F3	110 ^{+0.035} ₀	5	11	90	30	130	160	10	① KS063.9.011 ② -


PQ63FB... Feet
Piedini

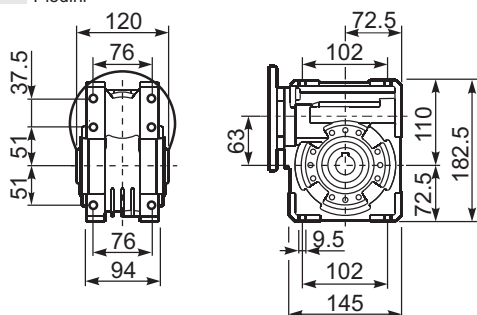

PQ63BR... Reaction arm
Braccio di reazione

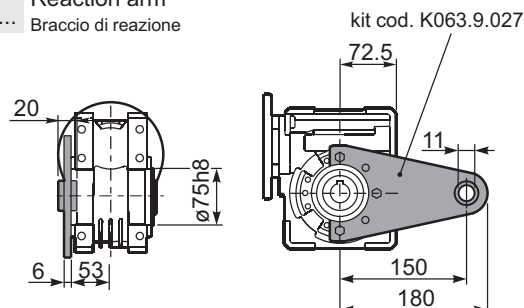


RQ63FB... Input shaft
Albero in entrata

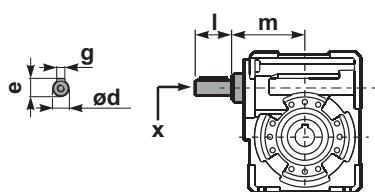


	ød	e	g	l	m	x	kit code
type B	18 h6	20.5	6	45	93	M6x16	① K063.5.006 PAM80 ② K063.5.007 PAM90
type S	19 h6	21.5	6	40	93	M8x20	① KS063.5.008 PAM80 ② KS063.5.009 PAM90

PQ63.....S... Single Shaft
Albero lento semplice



PQ63.....D... Double Shaft
Albero lento bisp.



① kit cod. K063.5.028 type B

② kit cod. K063.5.029 type B

	b1	c1	d1	e1	f1	l1	m1	n1	t2	o1
type B	8	60	25 ^{+0.005} _{+0.020}	63.2	120	246.4	126.8	190	28	M8x20
type S	-	-	-	-	-	-	-	-	-	-